


2/19/70

(implementation algorithms over time)

directory object descriptions

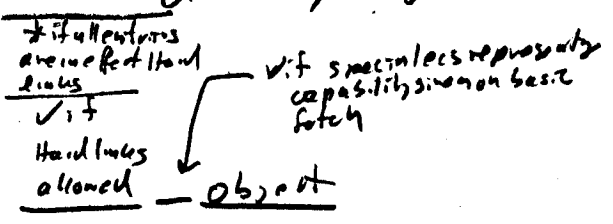

description

- ✓ ✓ d.34 file disk address of header & unique name
- ✓ ✓ directory disk address of header & unique name.
- ✓ ✓ subprocess descriptor disk address of header & unique name
- * ✓ ecs object index in master c-list (+ d.34 type & unique name? + touch?)

Hard link

exactly same data as for a non link entry, except a flag to indicate non ownership. (with hard links are defined by the special ecs representing capability, in all cases of ✓ in column 2) (i.e. to make a hard link, you must have the basic object (set fetched from a directory))

Soft link

access key
 text of a name

- * access key an integer
- * ✓ ecs goodie an integer + unique name | or just unique name?